

CHARACTER:

1. Physical performance

- a、Excellent mechanical properties
- b、Excellent thermal stability
- c、Low temperature soft good performance
- d、Good flame retardancy
- e、high of resistance to chemicals
- f、Chemistry stability is good

2. Electrical Properties

- a、Electrical insulation good
- b、Good the dielectric properties

3. Processing properties

- a、Using the hot extrusion processing
- b、Can be twisted pair and multi-core
- c、According to UL standard design

4. Environmental protection

- a、low smoke, non-halogen
- b、ROHS/REACH compliant


SHOULD BE USED:

Internal wiring .

REFERENCE:

UL758-2010、UL1581-2009

Outline:

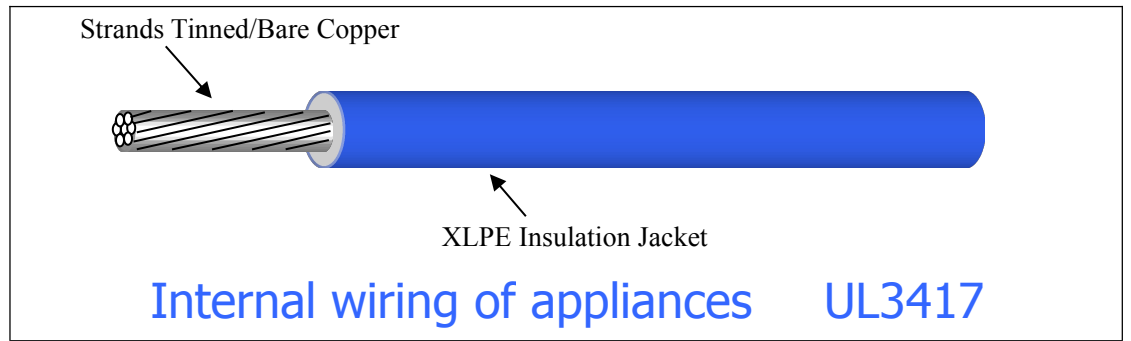

Wire structure description:
 Conductor: Tinned /Bare copper ;
 Insulation materials: XLPE Insulation

Internal wiring 。 Conductor temperature not over 125℃ XLPE insulated wire
 Rated temperature: 125℃ rated voltage: 30V

STYLE	standard AWG	Conductor size (No./ mm) ±0.005mm	Conductor resistance 20℃ (Ω/Km)	Conductor Dia.(mm)	insulation thickness (mm)		Overall diameter (mm)	
					Nom.	Min.	Nom.	Tole.
3417	10	105/0.254	3.54	3.00	0.35	0.20	3.70	±0.15
	12	65/0.254	5.64	2.36	0.30	0.20	3.00	±0.15
	14	41/0.254	8.96	1.88	0.30	0.20	2.50	±0.15
	16	26/0.254	14.60	1.50	0.30	0.20	2.10	±0.10
	18	16/0.254	23.20	1.17	0.30	0.20	1.75	±0.10
	20	21/0.18	36.70	0.95	0.25	0.20	1.46	±0.10
	22	17/0.16	59.40	0.76	0.25	0.20	1.26	±0.10
	24	11/0.16	94.20	0.61	0.25	0.20	1.10	±0.10
	26	7/0.16	150.00	0.48	0.25	0.20	1.00	±0.10
	28	7/0.127	239.00	0.38	0.25	0.20	0.90	±0.10
	30	7/0.10	381.00	0.30	0.25	0.20	0.80	±0.10

Marking: E211048 AWM STYLE 3417 NO.AWG 125℃ 30V XLPE QIFURUI
 AWM I A 125℃ 30V FT2 -LF-
 OR: E211048 AWM STYLE 3417 NO. AWG 125℃ 30V XLPE QIFURUI 221756
 CSA AWM I A 125℃ 30V FT2 -LF-

SAE COLOR SERIES

* STOCK COLOR CHART				
00-BLACK	01-WHITE	02-RED	03-YELLOW	04-GREEN
05-BLUE	06-BROWN	07-GREY	08-ORANGE	09- VIOLET

PACKAGE

*PACKAGE					
Part No.	Packing- FT/roll				
10AWG	<input type="checkbox"/> 250Ft	<input checked="" type="checkbox"/> 500Ft	<input type="checkbox"/> 1000Ft	<input type="checkbox"/> 2000Ft	
12~16AWG	<input type="checkbox"/> 250Ft	<input type="checkbox"/> 500Ft	<input checked="" type="checkbox"/> 1000Ft	<input type="checkbox"/> 2000Ft	
18~30AWG	<input type="checkbox"/> 250Ft	<input type="checkbox"/> 500Ft	<input type="checkbox"/> 1000Ft	<input checked="" type="checkbox"/> 2000Ft	

According to customer requirements for packaging packaging